



Model:

**DA-RLD-WW-30W
IP20**

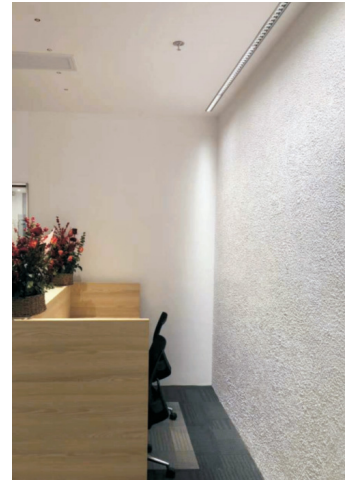

**CE &
Energy Star Compliant**

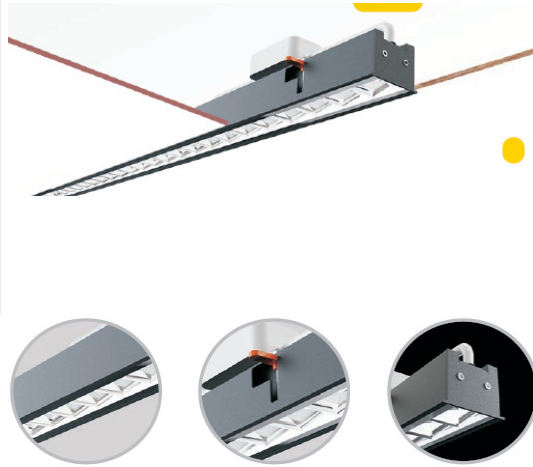

Features

- Ideal for Retail, Commercial Foyers and Residential
- Slim line Compact Design
- Recommended Distance from Wall: 15CM or 20CM
- Energy saving up to 50% compared with traditional ones under same flux
- Life Span: over 50,000 hrs
- DALI Driver Available
- Warranty: 5 years

Specification

Model	DA-RLD-WW-30W
Power Consumption	30W
Dimensions (mm)	(L)997x (W)60 x (H)45mm
Cut-out	998x 55mm
Color Temperature	3000K
Initial Luminous flux	2760 lm
Color Rendering index (CRI)	>90
Power Factor	>0.9
Mounting	Recessed
Driver	RCM Compliant Remote, DALI Available
Beam Angle	10°/15°/30°/45°

Benefits

- Extra Long Life More than 50,000 hours
- Save up to 80% of energy Consumption & reduce maintenance costs
- Virtually no heat or UV output
- No Mercury & Resistant to Shock and vibration